



ThunderION 2.0

The ThunderION is a revolutionary development in both design and functionality. It offers long distance static elimination even up to one meter. The robust design of the reinforced extruded profile allows the use in industrial environment up to even 5 m length. The T-ridge on the backside of the ThunderION enables the user to position the Simco-Ion universal mounting brackets as desired, allowing optimal mounting flexibility.

The disc shaped emitters differ from the conventional emitters. They produce a high and balanced ion output. The emitters are shockless when accidentally touched. A flexible and replaceable structure prevents damage to the emitters when hit by foreign objects.

The ThunderION has an integrated high voltage power supply and requires only a low voltage input of 24V DC. The new concept for long range static neutralisation is achieved with a combination of pulsed DC and a low frequency. LED's on four sides visualise bar ON or bar ALARM.

The totally new designed housing makes it very easy to clean the ThunderION. End brackets, middle support brackets, side plates and emitters can be easily removed to gain access to the whole surface for fast and accurate cleaning.

With certain production processes its necessary to neutralise static electricity at a very long distance, for example winding and rewinding of webs where the diameter of the re-windingsection changes continuously. With the ThunderION a new technique is being used were long range neutralisation is possible without air support as transport medium for the ions.


Features:

- 24V DC input voltage
- Long range neutralisation of static charges up to 1000 mm
- Shockless touchable emitters
- Flexible, replaceable emitter holders
- Removable support brackets
- Removable end brackets
- Removable side plates
- Visual indications with multicolour LED's on 4 sides
- Universal mounting brackets
- Patented technology
- Shockless emitters
- IQ version available with f.e. clean bar indication




Technical specifications


Thunderion 2.0			
Working distance	300 - 1000 mm		
Housing material	Plastic		
Emitters	Special alloy		
Cable	Low voltage cable		
Weight	Base 0,8 kg + 2,4 kg/m		
Ambient temperature	0-55 °C		
Use circumstances	Industrial		
Input power	24 V DC, <2 A		
Protection classification	IP65		
Suitable power unit	Intergrated, 24V DC voltage input		
Indication	High bright LED green/orange/red		
Signalling	Continuous	Flashing	
	Green	In operation	Standby
	Red	Overload	HV OK overload
IO signals	Remote on/off; 10-30 V DC High voltage OK; Supply voltage - 1V. Max 50 mA		
Options	Desktop power supply (100-240 V / 24 V)		
	Din rail power supply (100-240 V / 24 V)		
	IQ version		

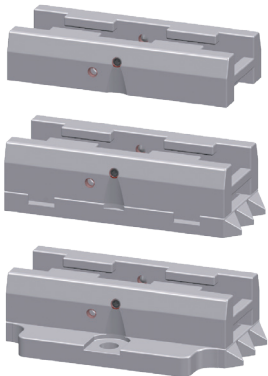


Universal mounting brackets

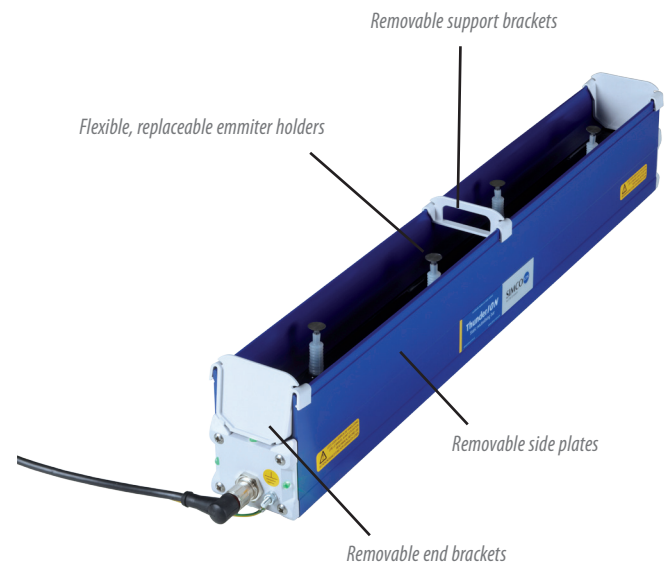


ThunderION 2.0 without support -and end brackets for easy cleaning

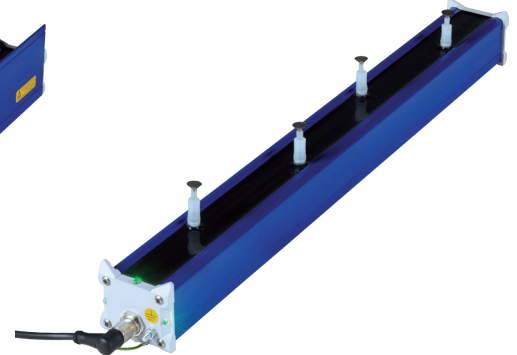

ThunderION 2.0 without support brackets, end brackets and sideplates for easy cleaning

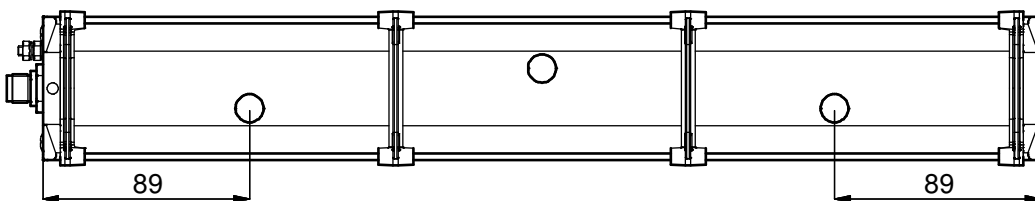

Technical drawing ThunderION 2.0



SIMCO ION™

An ITW Company
ThunderION2.0_PS_GB_V1_0
©Simco-Ion – All rights reserved.
Specifications are subject to change without notice.

Simco-Ion Netherlands

Postbus 71
Lochem, The Netherlands NL-7240 AB-
Tel: +31 (0)573 288333
Fax: +31 (0)573 257319
general@simco-ion.nl
www.simco-ion.nl